

Fig. 1

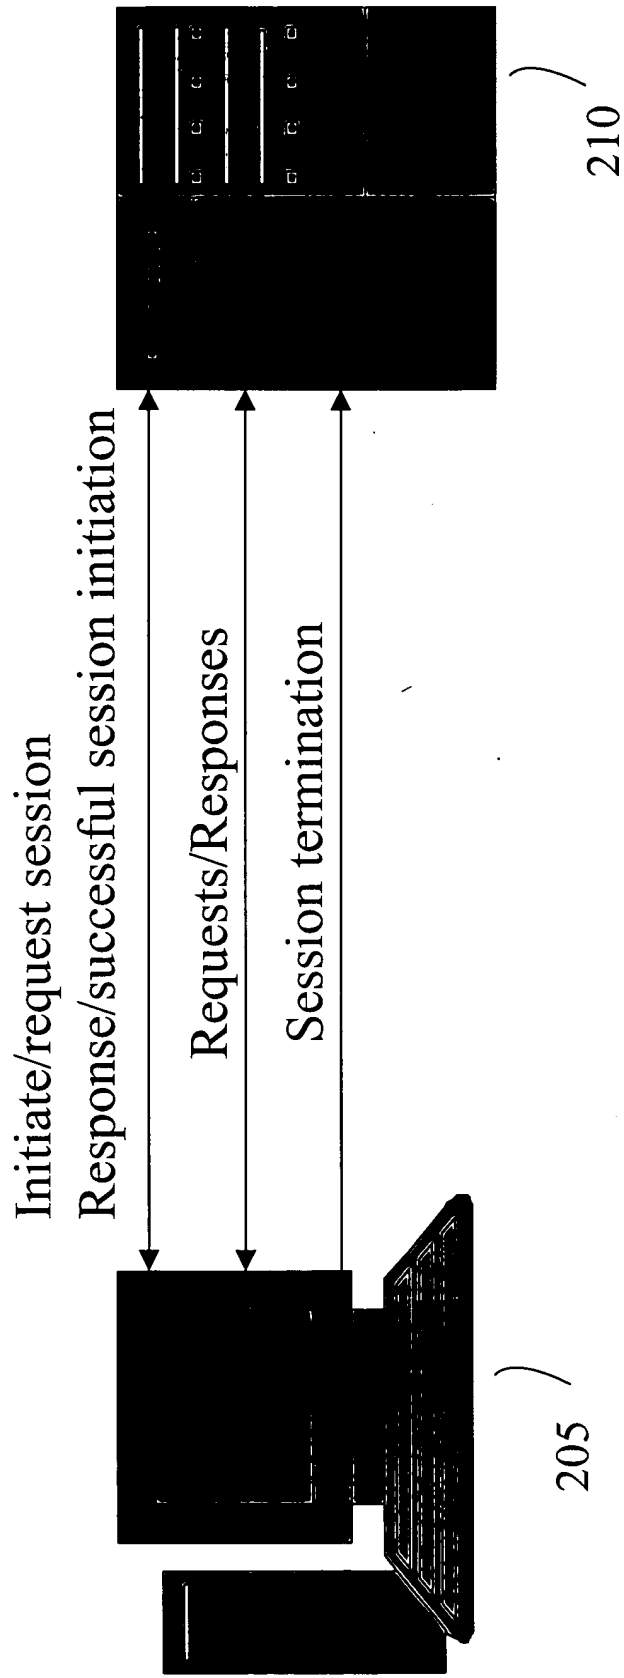


Fig. 2

[illegible]

- | | Administrative requests: |
|----------------------|-------------------------------------------|
| <auth> | client turn in an authentication sequence |
| <list/> | list server data of various kinds |
| <help/> | return usage information |

Fig. 3

General Error Response:

<error-response> return an error from the corresponding request

Responses to requests that reference objects:

<search-response> return a resultset containing the attributes

<retrieve-response> return a resultset containing the attributes

<delete-response> return a resultset with the deleted object ids

<modify-response> return a resultset for the modified objects

<count-response/> return the number of objects that satisfied the filter

<create-response> return a resultset with the new object

<expose-response> return a resultset with the exposed objects

Administrative request responses:

<auth-response> server response in an authentication protocol

<list-response> server data that was requested

<help-response> usage information

Fig. 4